
 THERMOPLASTIC VALVES INC. ARRANGEMENT DRAWING Y SEDIMENT STRAINER		
SIZE: 2 1/2" THRU 4"		
DWN BY CKP	DATE 1-2008	DWG NO. 110-YS4
GENERAL DIMENSIONS DATE _____ PER: _____		

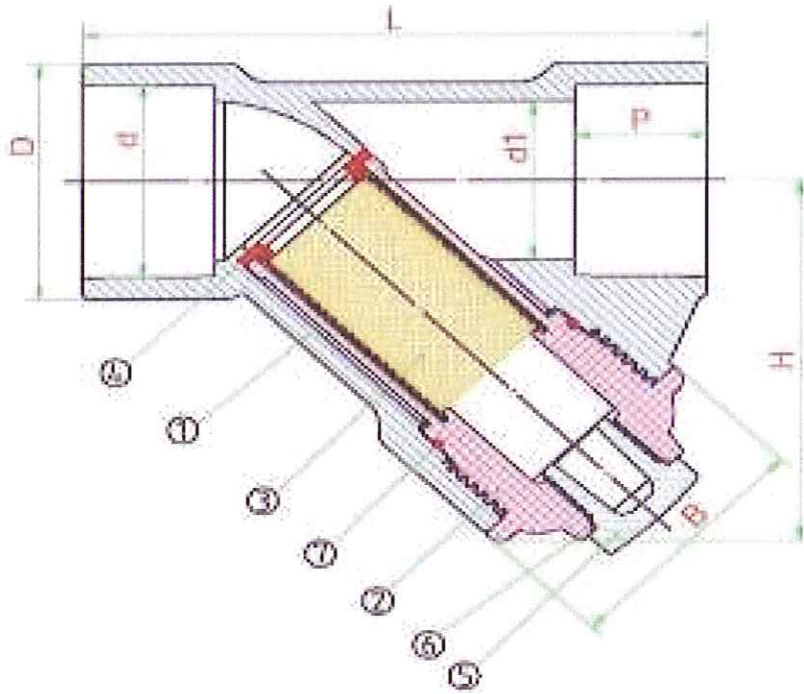

Material Of Construction

Item	Part	Pcs	Materials	Item	Part	Pcs	Materials
1	Body	1	PVC	5	Lid	1	pvc
2	Screen Rack	1	PVC	6	O'Ring	1	epdm, viton
3	Screen	1	PVC	7	O'Ring	1	epdm, viton
4	Clip	1	ABS				

Ansi Dimensions

Nom. Size DN-Inch	d1	D	L		P	d		H	Unit:Inch B	Working Pressure (PSI)
			SOC/THD	FLANGED		SOCKET	THREAD (NPT)			
2 1/2"	2.39	3.52	8.25	10.33	1.752	2.889	2 1/2	5.4	3.52	150
3"	3.15	4.3	9.63	11.91	1.875	3.516	3	6.45	4.3	150
4"	3.94	5.36	11.69	14.02	2.25	4.518	4	7.84	5.36	150

Testing performed on PVC/EPDM valves at 73°F water temperature, non-shock.

TVI Y-SEDIMENT STRAINERS 2 1/2" THRU 4"

DESIGN SPECIFICATIONS

Thermoplastic Y-Sediment Strainers have a one piece clear PVC body.
The Body connection is socket. Available in threaded and flanged if required.
Filter screen standard 20 mesh PVC is easily removed for cleaning or replacing.
Strainers tested at 150 psi before shipment from manufacturing plant.

BODY

All parts except seals
PVC, ASTM D-1784

SEALS

EPDM, Ethylene Propylene Diene Monomer
Flouorocarbon, Viton® (Dupont Dow Elastomers)

End Connectors Shall conform to the following standards:

SOCKET

ASTM-D-2467 (PVC, SCH-80)

THREADED

ASTM-D-2464 (PVC, SCH-80)

FLANGED

ANSI-B16.5 Class 150